

PRODUCTION PLANTS



LANA, S. Coop.
B° Santxolopetegi, 24 • Apdo. 25
20560 OÑATI (Gipuzkoa)
SPAIN
Tel.: +34 943 780 700
Fax: +34 943 780 790



Czech LANA s.r.o.
Chrudimská 584
582 63 Ždírec nad Doubravou
CZECH REPUBLIC
Tel. +420 569 430 060
Fax. +420 569 430 061




3 - LAYER BOARD

IRU-PU

&

IRU-L3

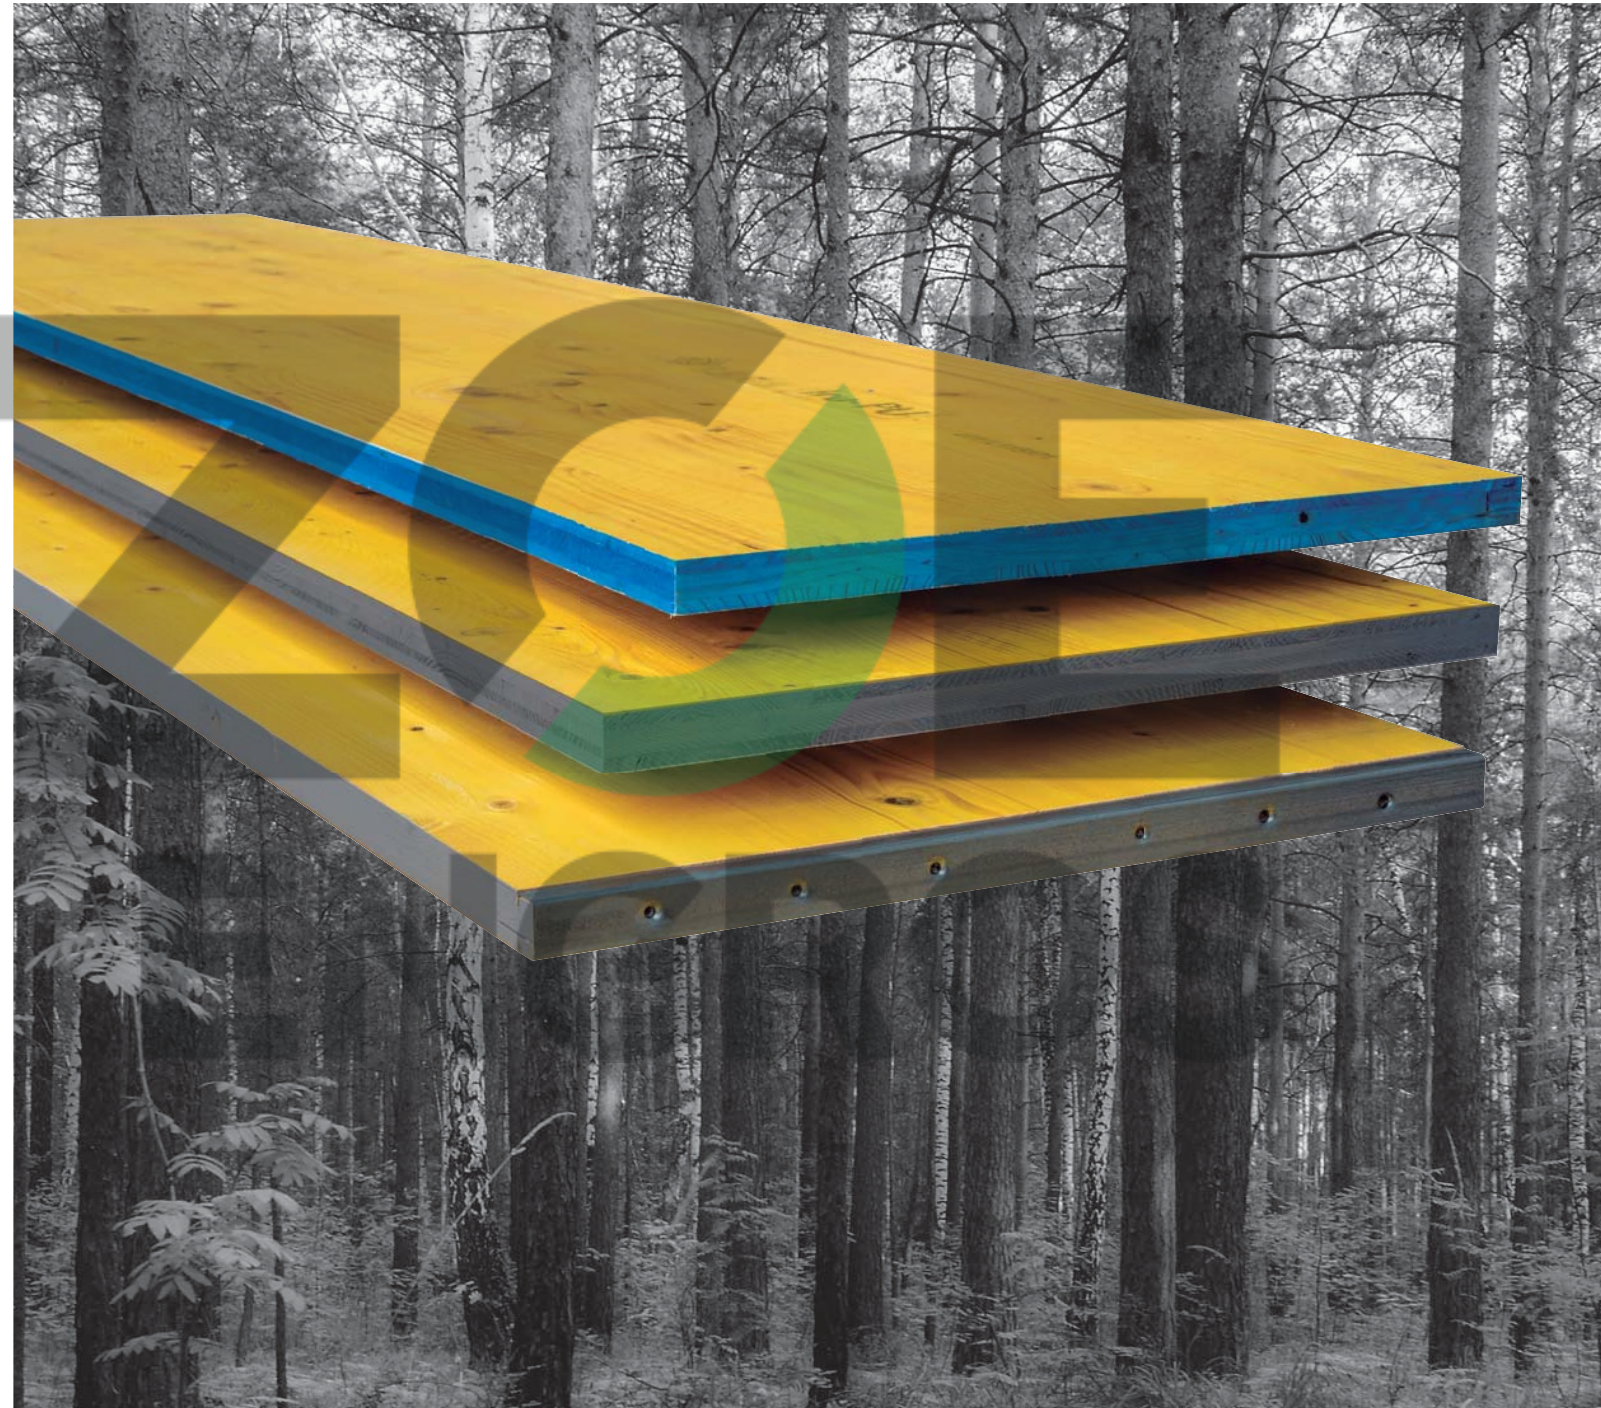

DISTRIBUTOR

Empty rounded rectangular box for distributor information.



IRU-PU & IRU-L3



SURFACE

Protected from the concrete by means of a melamine layer applied under controlled pressure on temperature conditions.



Wood oriented external layers to minimize cracking in the surface layer board



BOARD

Formwork board with three layers of timber glued together. The two outer boards are glued lengthwise and the inside board is glued crosswise.

TIMBER

We use Central European conifer timber. (Spruce).



Respect of the environment: All the timber used comes from countries with a sustainable forestry policy.



According to the norm EN13986:2004 system 4

ADVANTAGES WITH PU EDGE

- Reduce the moisture absorption.
- Prevent the cracking of the wood.
- Easy to clean saving time.
- Longer life, increasing the number of uses.

Advantages

PROFITABILITY

IRU-L3 contributes to reducing costs on site. With the same number of boards, a larger number of m² can be obtained.

SAFETY

Dimensional stability of the board and measurement accuracy.

WARRANTY

Based on compliance with the product operating manual. After-sales service through the company's own extensive.

VERSATILITY

Available sizes adapted to different formwork systems. Special sizes available.

SERVICE

Transport logistics adapted to the specific needs of the building industry.

QUALITY

Our product is normalized according to Ö-Norm B3023".

COLLABORATION

Lana has a technical and commercial team to support the customer in his business with the highest levels of professionalism.

GLUING

Gluing with Melamine Urea Formol (MUF) under controlled temperature and pressure conditions, bases on the SWP/3 Exterior condition of the UNE CEN/TS 13353 standard.

HUMIDITY

100% automated humidity control systems.

MARKING

All boards marked to guarantee traceability.



BENDING RESISTANCE

Thickness: 27 mm/21 mm
Average = 40 N/mm²
(calculated according to Ö-Norm B3023)

ELASTICITY MODULE

Thickness: 27 mm/21 mm
Average = 10.000 N/mm²
(calculated according to Ö-Norm B3023)

TECHNICAL CHARACTERISTICS

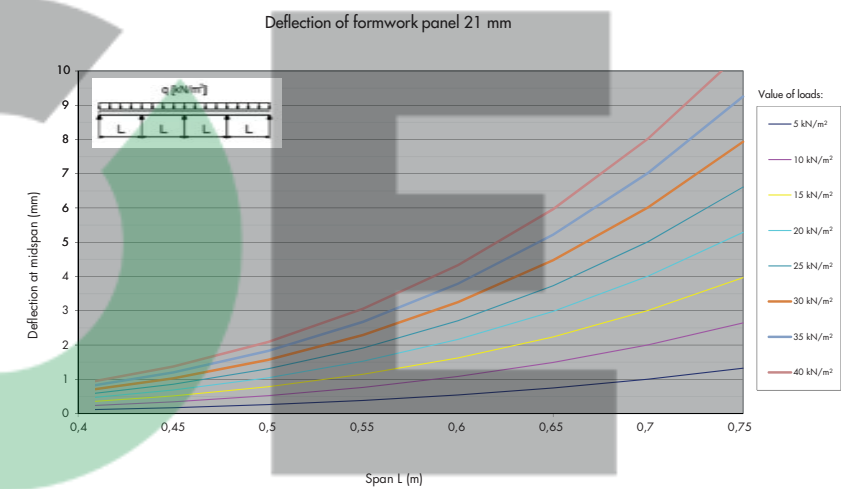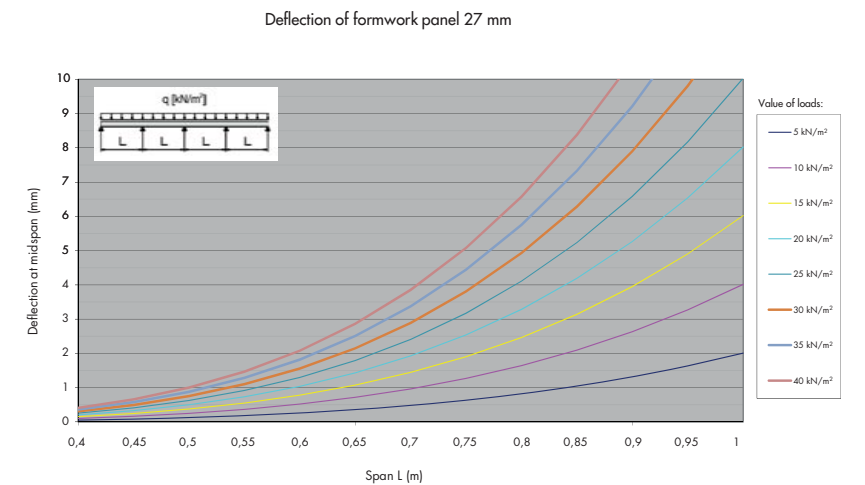

The charts provided are indicative in nature and cannot replace those supplied by the technical officer, responsible for the building work. Lana S. Coop. declines any responsibility in this regard. We reserve the right to modify the specifications contained in this catalogue without prior warning.

Operating manual

- | Apply formwork stripper before and after use on board faces and edges (even before the first installation).
- | Clean off remains of concrete on board after use.
- | Stack and strap these after use and until they are utilised again.
- | Store indoors protected from meteorological conditions.
- | Do not use for applications other than those typical of formwork.
- | Do not modify the physical-mechanical characteristics of the product.
- | Do not use the product when it appears that this might involve a risk to workers on site.



Applications

- Formwork systems
- Walls formwork
- Civil Works
- Flat main beam
- Foundations
- Safety elements



STANDARD SIZES

Length: 000, 1500, 2000, 2500 or 3000 mm*

Width: 500, 1000 mm*

Thickness: 21, 27 mm**

Special sizes are possible. Please consult us for availability and delivery dates.

* Tolerance in length and width of ± 2 mm according to UNE EN 13353:2003 standard

** Tolerance in thickness of ± 1 mm according to UNE EN 13353:2003 standard

PACKAGING

Thickness 21 mm: 100 board package

Thickness 27 mm: 80 board package

WEIGHT

Thickness 21 mm: 11 Kg/m²

Thickness 27 mm: 13 Kg/m²